


Mobile filter units

Air & (bio)gas

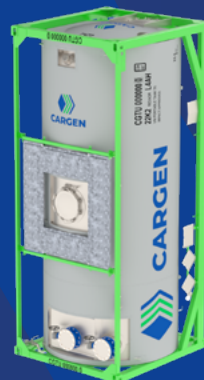

	AirPure ST	AirPure S	AirPure M	AirPure L	AirPure XL20	AirPure XL30
	Double way gas filtration	One way gas filtration	Compact medium flow rate filtration unit	Insulated incl. heating / cooling function	High flow rate box filter	High flow rate box filter
Max flow rate (m ³ /h)	1 000	2 000	4 500	5 000	35 000	55 000
Min flow rate (m ³ /h)	250	500	1 000	1 500	5 000	15 000
Max pressure (mbar)	100	100*	300	490	100	100
Mass AC (ton)	0.55 - 1.1	0.55 - 1.1	1.1 - 2	5 - 9	5.5 - 6.5	9.5 - 10.5
Dimensions WxDxH (m)	1.2 x 1.2 x 2.3	1.2 x 1.2 x 2.3	1.75 x 1.75 x 2.3	2.5 x 2.6 x 6.1	2.5 x 2.6 x 6.1	2.5 x 2.6 x 9.1
Max filling (m ³)	2	2	3	22	12.9	20.7

**AirPure S(HP) supports max pressures up to 490 mbar*

Mobile filter units

Water



AquaPure S

High operating pressure

AquaPure L

High operating pressure

Max flow rate
(m³/h)

10

80

Max pressure
(bar)

5

4*

Mass AC
(ton)

0.5 - 0.9

4 - 10

Dimensions
WxDxH (m)

1.5 x 1.5 x 2.3

2.5 x 2.6 x 6.1

Max filling
(m³)

2

22

**AquaPure L(HP)
supports max pressures
up to 6 bar*